




# LAN CABLE

## 6ACMRSH

### CMR(Riser Rated)

#### Cable Structure

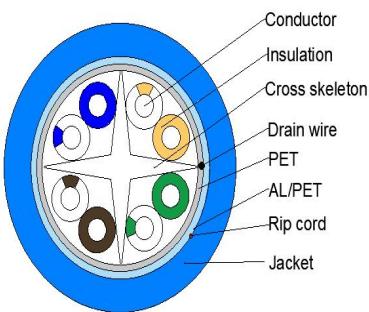

#### Test Standard

ISO / IEC 11801  
ANSI / TIA-568.2-D

c(ETL)

Indoor Communication

#### Construction & Specifications

- Conductor: Solid-Bare Copper 0.58±0.05mm
- Insulation: High Density Polyethylene HDPE 1.15±0.03mm
- Insulation Color:
  - 1. Blue & White with Blue
  - 2. Orange & White with Orange
  - 3. Green & White with Green
  - 4. Brown & White with Brown
- Cross : Polyester
- Wrap: Overall polyester foil
- Drain wire : Tinned copper 0.40±0.05mm
- Shield: Overall polyester backed aluminum foil
- Rid cord: A nylon rip cord under jacket for ease of jacket stripping
- Jacket: Premium grade Blue or White PVC jacket 7.60±0.30mm

#### Jacket Physical Properties

Before Aging Tensile Strength (MPa)	≥ 13.5
Before Aging Elongation (%)	≥ 150
Aging Period ( °C x hrs )	100°C x 24h x 7d
After Aging Tensile Strength (MPa)	≥12.5
After Aging Elongation (%)	≥ 125

#### Printing:

PSI DATA FTP CAT6A 10Gig 4PR 23 AWG CMR (UL) c(UL) Exxxxxx VERIFIED TO ANSI/TIA-568.2-D CAT 6A RoHS 0000FT/1000FT

#### Remarks:

The information on this document is, to our knowledge, true and accurate. However, since the particular uses and the actual conditions of use of our products are beyond our control, establishing satisfactory performance of our products for the intended application is the customer's sole responsibility. All uses of PSI products and any written or oral information, suggestions or technical advice from PSI is without warranty, express or implied, and is not an inducement to use any product in conflict with any patent.

#### Electrical Performance ( 20 °C )

1.0-100.0 MHz Impedance ( Ω )	100±15
1.0-100.0 MHz Delay Shew ( ns / 100m )	≤45
Max DC Resistance ( Ω / 100m )	7.23
Max DC Conductor Resistance Unbalance ( % )	5.0
Voltage Rating:	80V

Temperature Range	
Temp Rating:	60°C
Operation Temperature	−20°C To +60°C

#### Technical Performance

MHz	RL ≥ dB	ATT ≤ dB	NEXT ≥ dB	PSNEXT ≥ dB
1	20	2	74.3	72.3
4	23	3.8	65.3	63.3
8	24.5	5.3	60.8	58.8
10	25	6	59.3	57.3
16	25	7.6	56.2	54.2
20	25	8.5	54.8	52.8
25	24.2	9.5	53.3	51.3
31.25	23.3	10.7	51.9	49.9
62.5	20.7	15.4	47.4	45.4
100	19	19.8	44.3	42.3
200	16.4	29	39.8	37.8
250	15.6	32.8	38.3	36.3
350	14.6	39.8	36.1	34.1
550	12.9	51.8	33.2	31.2

#### Packing

1,000' Reel / pallet

